

Job: \_\_\_\_\_

Item No.: \_\_\_\_\_

Model No.: **PBHTSA12**

## ANODIZED ALUMINUM HEATED TRANSPORT CABINET

Anodized aluminum is used where long-lasting durability and ease of maintenance are crucial, making it perfect for a correctional environment. The heated transport cabinet maintains safe food temperatures and ensures quality meals every time.

### Features & Benefits:

- Anodized exterior plus interior and exterior door panels. The hard, scratch-resistant surface remains free of fingerprints. Plus, it's sanitary and easy to clean.
- The top-mounted control console consists of a running light and thermostat (preset by the factory to 165° F). It is secured behind a lockable anodized aluminum shield.
- Removable (with tools) top mounted controls include all blowers, elements, and electronics. Easy to clean or service.
- Full length door handle at convenient height for everyone
- Locking hasp-style transport latch provides extra security
- Twelve (12) sets of stainless steel multiple ledges accommodate both 18" x 26" sheet pans and steam table pans.
- Side-to-side airflow pattern provides greater consistency of temperature with faster recovery after door opening
- Ergonomically-correct, vertical rear-mounted push handles.
- Full perimeter bumper protects walls and other equipment
- Heavy-duty 6" casters with tamper-resistant screws
- Insulated door for superior temperature maintenance



ETL LISTED



CONFORMS TO ANSI/UL STD 197; ANSI/NSF STD 4  
CERTIFIED TO CAN/CSA C22.2 STD NO. 109

### Warranty:

The PBHTSA12 carries a one-year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins date of purchase and, provided the unit is used in accordance with instructions, is in full effect for one year from that date. Any work performed under this warranty must be performed between the hours of 8:00 a.m. and 5:00 p.m. local time, Monday

through Friday. Prisonbilt will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Prisonbilt shall not be liable for any consequential, compensatory, incidental, or special damages. Contact the Prisonbilt service department for any warranty claims.

### PRISONBILT

4900 W. Electric Avenue • West Milwaukee, WI 53219  
phone (414) 902-6680 • fax (414) 902-6446  
www.prisonbilt.com


Job: \_\_\_\_\_

Item No.: \_\_\_\_\_

Model No.: **PBHTSA12**

**Construction Specifications:**

- **Construction:** High tensile strength anodized aluminum. Sides, back and top are .090 gauge and base is .190 gauge. All parts are die-formed, welded and sealed to form a unitized cabinet.
- **Door:** Door consists of heavy-duty extruded frame with full-length extruded handle. Full perimeter magnetic gasket firmly seals and secures door to cabinet. Door swings 270° to recess at side of cabinet and is protected by the base. Door is insulated and is to be made of .050 anodized aluminum panels.
- **Sheet Pan Capacity:** 12 sets of stainless steel multiple ledges accommodate both 18x26 sheet pans and steam table pans.
- **Air Flow:** Conditioned air to be blower-forced in a circular side-to-side pattern
- **Controls:** Top-mounted control console to include thermostatic controls, external lighted on/off switch, blowers, running light, elements, and thermometer. Entire console to be removable with tools for cleaning or service.
- **Casters:** Heavy-duty 6" diameter x 2" head casters, two with heavy-duty brakes
- **Safety Features:** Tamper-resistant security hardware used throughout
- **Bumper:** Full perimeter bumper to protect walls and equipment
- **Power Cord:** Provided with 9'-12/3 type cord for 120V/20A operation
- **Certification:** Intertek certified to pass or surpass UL and NSF Standards

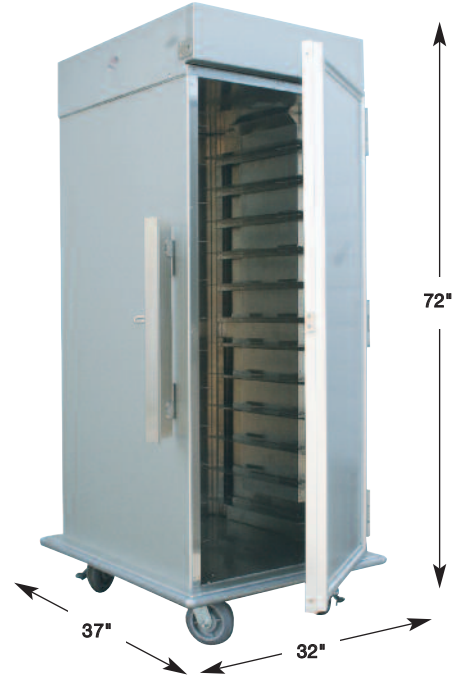

Item Number	# of Slides	Pan Capacity		Dimensions (inches)			Shipping Weight (lbs)
		18" x 26"	12" x 20"	Width	Depth	Height	
PBHTSA12	12	12	24	32"	37"	72"	280

**PRISONBILT**